

Marshell
www.marshell.net



Sales Branches:

HongKong Office:

Tel: +852- 3578 6663
Email: Sales@marshell.net

Shenzhen Office:

Tel: +86-0755- 8603 6245
Email: Sales@marshell.net

Guangdong Office:

Tel: +86-0758-3603 219
Email: Sales@marshell.net

Shanghai Office:

Tel: +86-021-5754 6552
Email: Sales@marshell.net

Manufacturing Bases:

Guangdong Factory:

GUANGDONG MARSELL ELECTRIC VEHICLE CO., LTD.
Add.:Linjiang Industrial Area, Zhaoqing, Guangdong,
China 526238

Shanghai Factory:

SHANGHAI MARSELL ELECTRIC VEHICLE CO.,LTD
Add.: 1428# Haijie Road, Situan Town, Fengxian
District, Shanghai, China, 201413

EAOE: 2019-10

Marshell



SIGHTSEEING BUS

MARSELL ELECTRIC VEHICLE

GUANGDONG MARSELL ELECTRIC VEHICLE CO., LTD.

SHANGHAI MARSELL ELECTRIC VEHICLE CO.,LTD.

ANHUI MARSELL ELECTRIC VEHICLE CO.,LTD.



Who we are?

COMPANY PROFILE

Index >>>

Company Profile	01
-----------------	----

Open version

DN-4	05
DN-8	07
DN-8F	09
DN-11	11
DN-14	13
DN-14G	15
DN-17	17
DN-23	19

Half close version

DN-14B	21
DN-23B	23

Close version

DN-4C	27
DN-8C	29
DN-11C	31
DN-14C	33
DN-23C	35

Trailer version

DN-14T	37
DN-23T	38

Customized verion

Optional Accessories	41
Cases	42-44



Guangdong Factory Showroom



Shanghai Factory Showroom




Automatic Production Line of Golf Cart



Automatic Production Line

How fast we have grown

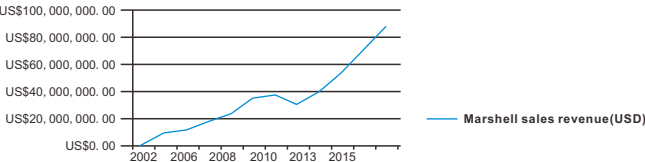

What we can do

-
-
-
-
-

How we treat our customers

*

What we have achieved



ISO 14000



ISO 9001



CE Certificate for Golf Car



CE Certificate for Sightseeing Vehicle



CE Certificate for Mobility Scooter



CE Certificate for Mobility Scooter



CE Certificate for Hunting Car & Utility Vehicle



CE Certificate for Electric Scooter

Open version



MARSHELL SIGHTSEEING BUS



DN-4

- PT-206C
- RAL-9017
- MAR-8733
- PT375C
- MAR-8703

Specifications

Passenger Capacity	4
--------------------	---

Power Supply

Battery	6V*8pcs
Motor	48V 3KW
Controller	48V 325A
Charger	48V Charger

Mechanical Parts

Steering	"Rack&Pinion" steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	145/70R12 69S
Ground Clearance	120mm

Dimension And Loading

Overall Dimension	3380*1380*2025mm
Qty Per Container	2pcs/20FT 5pcs/40FT 5pcs/40HQ

Performance

Max. Speed	25km/h
Max.travelling Range	60km
Slope Climbing Capacity	30%
Brake Range	≤5m
Turning Radius	≤5m
Carrying Capacity	340kg
Weight	770kg





DN-8



Specifications

Passenger Capacity	8
Power Supply	
Battery	6V*8pcs
Motor	DC 48V/4KW
Controller	DC 500A/48V-DC/ AC Curtis/Toyota
Charger	48V Full automatic high frequency charger

Mechanical Parts

Steering	Recirculating-ball steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	145/70R12 69S
Ground Clearance	150mm

Dimension And Loading

Overall Dimension	3700*1450*2000mm
Qty Per Container	2pcs/20FT 5pcs/40FT 5pcs/40HQ

Performance

Max. Speed	25km/h
Max.travelling Range	60km
Slope Climbing Capacity	20%
Brake Range	≤6m
Turning Radius	6.0m
Carrying Capacity	680kg
Weight	830kg





DN-8F



Specifications

Passenger Capacity	8
--------------------	---

Power Supply

Battery	6V*8pcs
Motor	DC 48V4KW
Controller	DC 500A/48V AC Curtis
Charger	48V full automatic high frequency charger

Mechanical Parts

Steering	"Rack&Pinion"Steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	165/70R13
Ground Clearance	130mm

Dimension And Loading

Overall Dimension	4200*1520*2025mm
Qty Per Container	2pcs/20FT 4pcs/40FT 4pcs/40HQ

Performance

Max. Speed	25km/h
Max.travelling Range	60km
Slope Climbing Capacity	20%
Brake Range	6m
Turning Radius	6.5m
Carrying Capacity	680kg
Weight	1010kg





DN-11



Specifications

Passenger Capacity 11

Power Supply

Battery	6V*12pcs
Motor	DC 72V5KW or AC 7.5KW/51V
Controller	DC 72V400A(curtis 1205)or AC Curtis/Toyota
Charger	"72V full automatic high frequency charger"

Mechanical Parts

Steering	"Rack&Pinion"Steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	165/70R13
Ground Clearance	130mm

Dimension And Loading

Overall Dimension	4635*1520*2025mm
Qty Per Container	2pcs/20FT 4pcs/40FT 4pcs/40HQ

Performance

Max. Speed	28km/h
Max.travelling Range	60km
Slope Climbing Capacity	20%
Brake Range	6.5m
Turning Radius	6.5m
Carrying Capacity	935kg
Weight	1190kg



MARSHELL SIGHTSEEING BUS



DN-14

- PT-206C
- RAL-9017
- MAR-8733
- PT375C
- MAR-8703

Specifications

Passenger Capacity	14
--------------------	----

Power Supply

Battery	6V*12pcs
Motor	DC 72V5KW
Controller	DC 72V400A or AC curtis / Toyota
Charger	"72V full automatic high Frequency charger""

Mechanical Parts

Steering	"Rack&Pinion"Steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	165/70R13
Ground Clearance	130mm

Dimension And Loading

Overall Dimension	4800*1520*2025mm
Qty Per Container	2pcs/20FT 4pcs/40FT 4pcs/40HQ

Performance

Max. Speed	28km/h
Max.travelling Range	60km
Slope Climbing Capacity	20%
Brake Range	6.5m
Turning Radius	6.5m
Carrying Capacity	1190kg
Weight	1210kg





DN-14G



Specifications

Passenger Capacity	14
Power Supply	
Battery	6V*12pcs
Motor	72V / 5KW or AC 51V/7.5KW
Controller	72V400A DC or AC curtis / Toyota
Charger	72V Full automatic high frequency charger

Mechanical Parts

Steering	Recirculating-ball steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	165/70R 13
Ground Clearance	130mm

Dimension And Loading

Overall Dimension	4900*1550*2060
Qty Per Container	2pcs/20GP 4pcs/40HQ

Performance

Max. Speed	28km/h
Max.travelling Range	60km
Slope Climbing Capacity	20%
Brake Range	≤6
Turning Radius	8.5m
Carrying Capacity	1190kg
Weight	1360kg





DN-17



Specifications

Passenger Capacity	17
--------------------	----

Power Supply

Battery	6V*12pcs
Motor	DC 72V5KW or AC 51V/7.5KW
Controller	Cutis 72V400A or AC curtis / Toyota
Charger	72V Full automatic high

Mechanical Parts

Steering	Rack&Pinion"Steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	165/70R13
Ground Clearance	130mm

Dimension And Loading

Overall Dimension	5600*1520*2025mm
Qty Per Container	2pcs/20FT 4pcs/40FT 4pcs/40HQ

Performance

Max. Speed	25km/h
Max.travelling Range	60km
Slope Climbing Capacity	15%
Brake Range	6.5m
Turning Radius	7m
Carrying Capacity	1445kg
Weight	1480kg



Specifications

Passenger Capacity	23
--------------------	----

Power Supply

Battery	6V*24pcs
Motor	AC 72V / 9KW
Controller	Curtis 72V550A
Charger	2*72V full automatic high frequency charger

Mechanical Parts

Steering	Recirculating-ball steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	195/70R15C
Ground Clearance	100mm

Dimension And Loading

Overall Dimension	5600*2100*2205mm
Qty Per Container	1pcs/20FT 2pcs/40FT 2pcs/40HQ

Performance

Max. Speed	28km/h
Max.travelling Range	120km
Slope Climbing Capacity	15%
Brake Range	≤6
Turning Radius	9m
Carrying Capacity	1955kg
Weight	2090kg



DN-23



MARSHALL SIGHTSEEING BUS



DN-14B



Specifications

Passenger Capacity	14
--------------------	----

Power Supply

Battery	6V*12pcs
Motor	DC 72V5KW or AC 7.5KW
Controller	DC 72V400A AC Curtis/Toyota
Charger	"72V full automatic high frequency charger"

Mechanical Parts

Steering	"Rack&Pinion"Steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	165/70R13
Ground Clearance	135mm

Dimension And Loading

Overall Dimension	4900*1550*2080mm
Qty Per Container	1pcs/20FT 2pcs/40FT 2pcs/40HQ

Performance

Max. Speed	28km/h
Max.travelling Range	60-80km
Slope Climbing Capacity	20%
Brake Range	≤6.5
Turning Radius	≤6.5
Carrying Capacity	1190kg
Weight	1500kg





DN-23B



Specifications

Passenger Capacity	23
--------------------	----

Power Supply

Battery	8V*24pcs
Motor	72V / 9KW AC or 96V/12KW
Controller	Curtis 72V550A
Charger	2*72V full automatic high frequency charger

Mechanical Parts

Steering	Recirculating-ball steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	195/70R15C
Ground Clearance	100mm

Dimension And Loading

Overall Dimension	5770*1800*2205mm
Qty Per Container	1pcs/20FT 2pcs/40FT 2pcs/40HQ

Performance

Max. Speed	28km/h
Max.travelling Range	120km
Slope Climbing Capacity	15%
Brake Range	≤6
Turning Radius	8.5m
Carrying Capacity	1955kg
Weight	2220kg



Close version



MARSHELL SIGHTSEEING BUS



DN-4-C

- PT-206C
- RAL-9017
- MAR-8733
- PT375C
- MAR-8703

Specifications

Passenger Capacity	4
--------------------	---

Power Supply

Battery	6V*8pcs
Motor	3KW motor
Controller	Curtis 48V/325A
Charger	48V Charger

Mechanical Parts

Steering	Recirculating-ball steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	145/70 R 12695
Ground Clearance	120mm

Dimension And Loading

Overall Dimension	3280*1380*2030 mm
Qty Per Container	1pcs/20FT 3pcs/40FT 3pcs/40HQ

Performance

Max. Speed	25km/h
Max.travelling Range	60km
Slope Climbing Capacity	20%
Brake Range	≤5
Turning Radius	≤5
Carrying Capacity	340
Weight	910kg





DN-8C



Specifications

Passenger Capacity	8
--------------------	---

Power Supply

Battery	6V*8pcs
---------	---------

Motor	4KW
-------	-----

Controller	Curtis 48V500A
------------	----------------

Charger	48V Charger
---------	-------------

Mechanical Parts

Steering	"Rack&Pinion"Steering
----------	-----------------------

Braking	Four wheels hydraulic braking system and independent parking brake
---------	---

Tyres	165/70R13C
-------	------------

Ground Clearance	135mm
------------------	-------

Dimension And Loading

Overall Dimension	3850*1550*2020mm
-------------------	------------------

Qty Per Container	1pcs/20FT 3pcs/40FT 3pcs/40HQ
-------------------	-------------------------------

Performance

Max. Speed	25km/h
------------	--------

Max.travelling Range	60km
----------------------	------

Slope Climbing Capacity	15%
-------------------------	-----

Brake Range	≤6.5
-------------	------

Turning Radius	≤5.5
----------------	------

Carrying Capacity	800kg
-------------------	-------

Weight	1100kg
--------	--------



MARSHELL SIGHTSEEING BUS



DN-11C

- PT-206C
- RAL-9017
- MAR-8733
- PT375C
- MAR-8703

Specifications

Passenger Capacity	11
--------------------	----

Power Supply

Battery	6V*12pcs
Motor	AC 72V 5KW
Controller	Curtis 72V400A
Charger	72V full automatic high frequency charger

Mechanical Parts

Steering	"Rack&Pinion"Steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	165/70R 13C
Ground Clearance	135mm

Dimension And Loading

Overall Dimension	4600*1550*2020mm
Qty Per Container	1pcs/20FT 2pcs/40FT 2pcs/40HQ

Performance

Max. Speed	28km/h
Max.travelling Range	60km
Slope Climbing Capacity	15%
Brake Range	≤6.5
Turning Radius	≤6.5
Carrying Capacity	935kg
Weight	1350kg



Specifications

Passenger Capacity	14
--------------------	----

Power Supply

Battery	6V*12pcs
Motor	DC 72V5KW or AC 7.5KW
Controller	DC 72V400A AC Curtis/Toyota
Charger	"72V full automatic high frequency charger"

Mechanical Parts

Steering	"Rack&Pinion"Steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	165/70R13
Ground Clearance	135mm

Dimension And Loading

Overall Dimension	4900*1550*2020mm
Qty Per Container	1pcs/20FT 2pcs/40FT 2pcs/40HQ

Performance

Max. Speed	28km/h
Max.travelling Range	60-80km
Slope Climbing Capacity	20%
Brake Range	≤6.5
Turning Radius	≤6.5
Carrying Capacity	1190kg
Weight	1500kg



DN-14C



Specifications

Passenger Capacity	23
--------------------	----

Power Supply

Battery	6V*24pcs
Motor	72V / 9KW AC
Controller	Curtis 72V550A
Charger	2*72V full automatic high frequency charger

Mechanical Parts

Steering	Recirculating-ball steering
Braking	Four wheels hydraulic braking system and independent parking brake
Tyres	195/70R15C
Ground Clearance	100mm

Dimension And Loading

Overall Dimension	5770*1800*2205mm
Qty Per Container	1pcs/20FT 2pcs/40FT 2pcs/40HQ

Performance

Max. Speed	28km/h
Max.travelling Range	120km
Slope Climbing Capacity	15%
Brake Range	≤6
Turning Radius	8.5m
Carrying Capacity	1955kg
Weight	2220kg



DN-23C



MARSHELL SIGHTSEEING BUS



DN-14T / Specifications

● Passenger capacity	29	● Climbing capacity(%)	5%
● Overall dimension(mm)	11100*1520*2025	● Charging time	8-10H
● Gross weight(KG)	2250	● Travelling range	50KM
● Carrying capacity(KG)	2300	● Qty per container	1pcs/2pcs/2pcs
● Motor	AC 72V/7.5KW	● Solar panel	Optional
● Controller	Curtis 72V550A		
● Battery	6V*12PCS		
● Max. speed(km/h)	25		



DN-23T / Specifications

● Passenger capacity	47	● Battery	6V*24pcs
● Overall dimension(mm)	12650*2100*2205	● Max. speed(km/h)	20
● Gross weight(KG)	3640	● Climbing capacity(%)	5
● Carrying capacity(KG)	3760	● Charging time	8-10H
● Motor	AC72V 15KW	● Travelling range	120KM
● Controller	Curtis 72V 550A	● Qty per container	1set/40HQ

MARSELL CUSTOMIZED SIGHTSEEING BUS



Optional Accessories



Vehicle Mounted Air Conditioning



Side Sunshade Curtain For DN-11



Weather Enclosure For DN-14



Trojan Battery (from USA)



Media Player



Loud Speaker



Maintenance-free battery



Power-assisted steering system



Aluminium Rim For DN-14



Bus seat



Storage Basket



seat belt

SUCCESSFUL CASE



SUCCESSFUL CASE



SUCCESSFUL CASE

